



3 PHASE SEQUENCE AMPERE METER & 3 PHASE SEQUENCE VOLT METER


3 phase sequence Ampere Meter

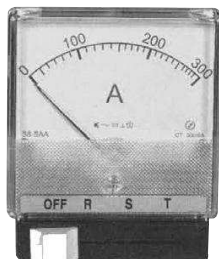

3 phase sequence Volt Meter

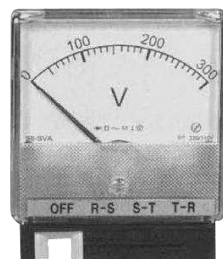

Model

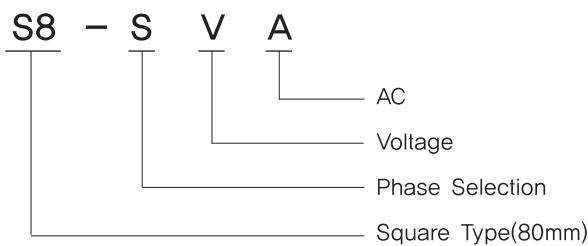


Specification

Part Name	3Phase Selection type Panel Board Meter (V, A)	
Item	Volt Meter(V)	Ampere Meter(A)
Type	S8-SVA	S8-SAA
Accuracy	±2.5%	±2.5%
Rating	AC 150V, 300V	AC 5A or 1A
Input berden	0.5VA	1.5VA
Frequency	AC 50/60 Hz	
Operating Type	Rectifier	Moving Iron type
Switch Durability	Operated 10,000 times.	
Insulation resistance	at 500V >100MΩ	
Dielectric withstand	between all terminals and case earthed, AC 2000V/MIN	
Material	Cover : Poly Cabonate, Case : ABS	
Weight	0.3kg	

※ S8-VA, S8-AA

Wiring

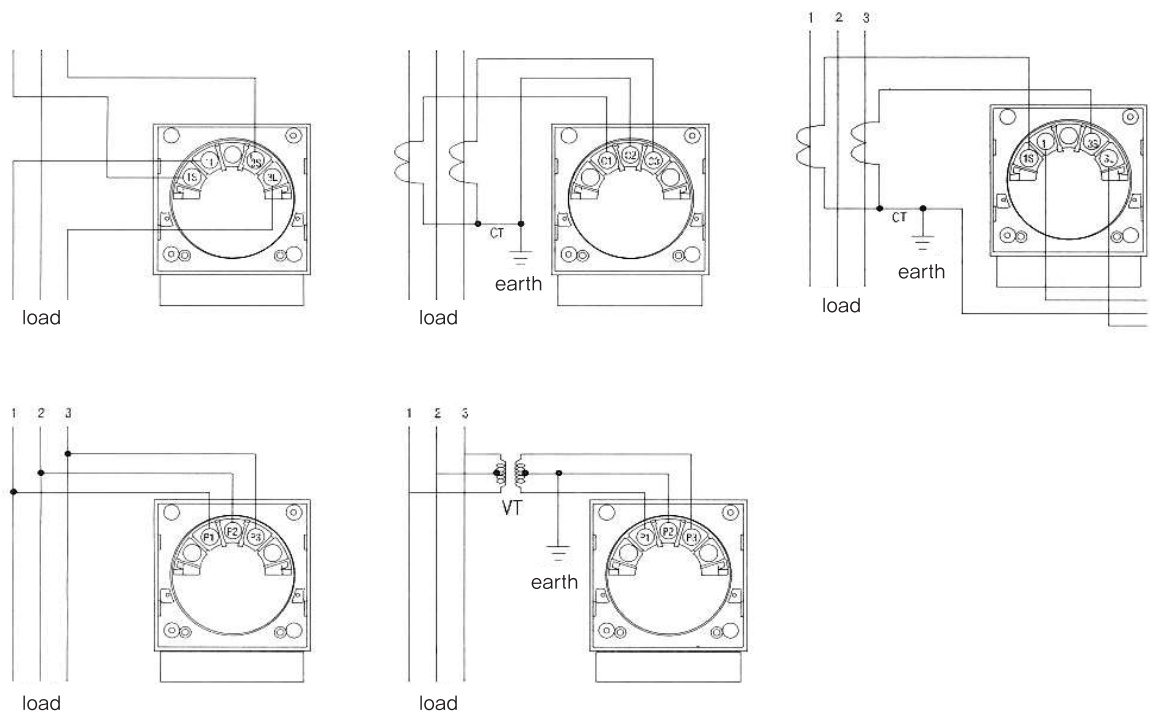

Dimension

